


NGTC-24140PWR2

The NGTC-24140PWR2 is a Dante™ enabled digital bridgeable power amplifier for the NEXGENTEC AUDIO distribution solution.

The nexgentec DSP super modules enable efficient design and deployment of the NGTC audio network system, featuring the highest levels of functionality and performance.

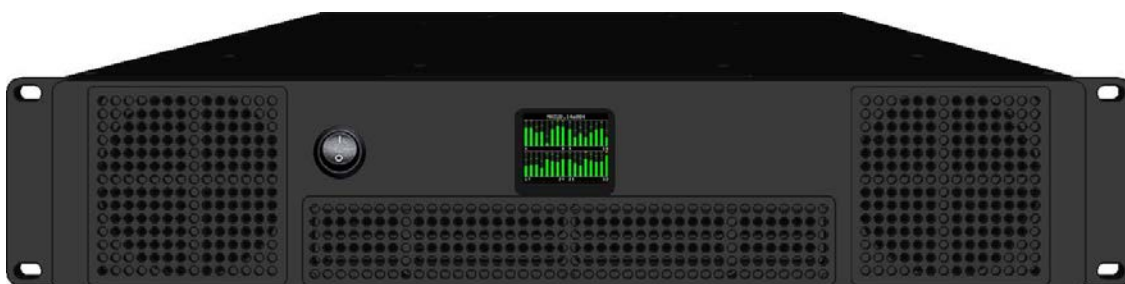

Key Features

- 24 x 280 W - 4 Ω / Ch 1% THD
- 24 x 140 W - 8 Ω / Ch 1% THD
- 2 kW wide range power supply
- 44.1 kHz / 48 kHz
- Control interface
- Web UI for monitoring and configuration
- SNMP
- Bridgeable: 500 W - 8 Ω

Power and Dimensions

Operating Power:	90 - 264 VAC 50 / 60 Hz – 16 A
Inrush Current:	50 A max
BTU Rating Idle:	282 BTU / hr
BTU Rating 1/8 Power @ 4 Ω :	833 BTU / hr
Operation Temperature Range:	0° to 40°C
Dimensions (H x W x D):	88.9 mm (2 U) x 482.6 mm (19 inch) x 421.3 mm
Weight:	14,3 kg