


NGTC-BTIR2 AES67 Bluetooth® Interface

The NGTC-BTIR2 is a universal Bluetooth® AES67 enabled audio interface for the NEXGENTEC AUDIO distribution solution.

The NGTC-BTIR2 features an API for navigation, configuration and management of the BT interface.

The nexgentec DSP super modules enable efficient design and deployment of NGTC audio network system featuring the highest levels of functionality and performance.

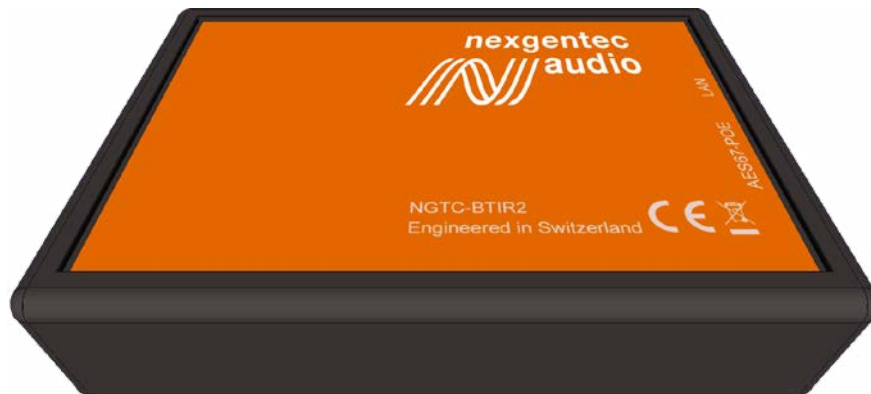

Key Features

- Supports android, iOS, PC, MAC devices
- Bluetooth® V5 down to V1.1, class 1.5
- 2.402 – 2.480 GHz
- Supports all audio formats
- LAN API interface
- Management API
- LAN AES67 audio port
- PoE powered

Power and Dimensions

Mains Voltage:	PoE
Power Consumption:	3 W
BTU Rating:	10
Operation Temperature Range:	5° to 30°C
Dimensions (H x W x D):	110 mm x 74 mm x 25 mm
Weight:	< 0.1 kg